





Brother's range of TD professional label printers offer the ability to print high quality labels on demand, whatever the requirement. Printing labels up to 4 inches in width, and with direct thermal print technology, they fit the requirements of a large range of vertical market applications.



TD professional desktop label printers




Seamless Integration

Brother's new high specification 4 inch desktop label printers bring you improved operational efficiency with easy to use, high speed and continuous label printing. Combined with seamless integration and modular design, print from virtually anywhere in the workplace. Supporting a variety of printer command languages including ZPL II emulation allows you to integrate into existing legacy systems.





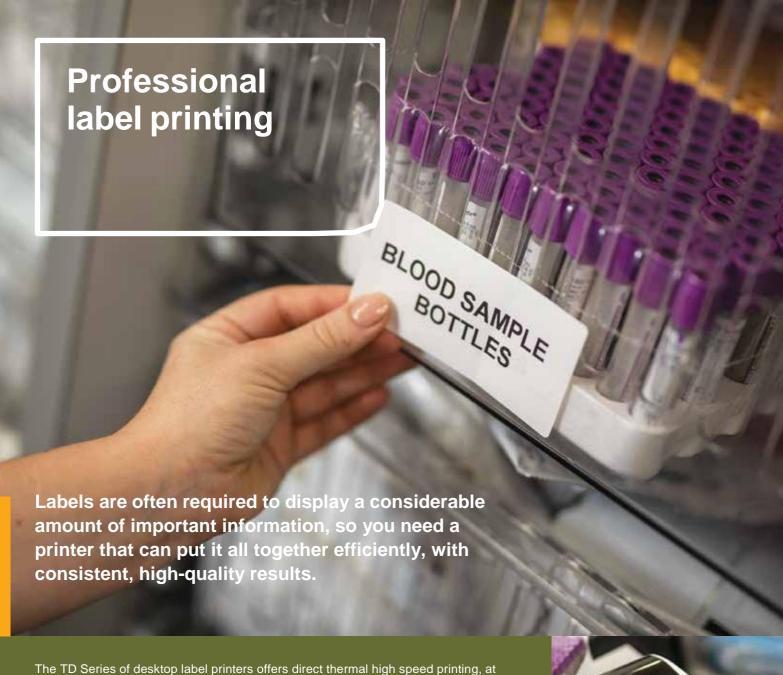

The TD Series of desktop label printers offers direct thermal high speed printing, at up to 203 dpi resolution. Options include a peeler or automatic cutter, for producing continuous media to your required length on demand.


The software supports barcode printing, embellish font programming for highlighting specific words, and also allows you to import graphics and date formats for a truly personalised solution.



Printing Technology

Direct Thermal

Low-cost, high-volume labels can be created through this process, which uses a heat-sensitive coating and thermal print head, meaning traditional printing ribbons and ink are not required. Ideal for shorter term and less permanent labelling uses.

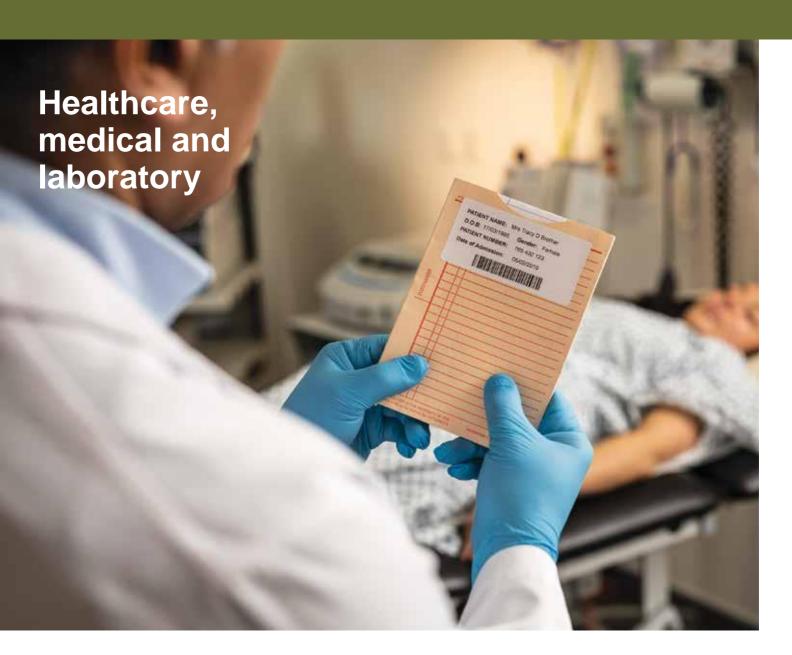

With the strict regulations on the tracking of patient specimens and other items within the healthcare industry, clear, high quality labelling is essential to maintain safety and traceability.

Applications include:

- Appointment cards
- Admission labels
- Specimen and pathology labels
- Blood bag labels
- Laboratory labels
- Microbiology labels
- Dosage/drug bag labels









Software					
Model No	TD-4410D	TD-4420DN			
P-touch Editor					
Brother Font Manager					
Printer Settings Tool					

For further details visit: https://support.brother.com



Efficient warehousing operation and worker productivity are critical to the success of many companies. With the most common sizes of shipping labels available and the ability to create custom size labels there are many uses for these models in the warehouse.

Applications include:

- Shipping labels
- Carton labels
- Location labels
- Pallet identification labels
- Quality control labels
- Compliance labels









Easy to read labels are essential for consumers to help make informed decisions prior to a potential purchase. The high print resolution and high quality labels used in this range ensure that every output printed looks professional, offering sharp text, logos and barcodes with a high contrast to ensure faultless scanning at the checkout.

Applications include:

- Pricing labels
- Barcode labels
- Pre-packaged food ingredients labels
- Nutrition information labels
- Shelf-edge labels
- Sale/mark-down/discount pricing labels









TD Range	TD-4410D	TD-4420DN				
brief summary	4 Inch					
Printing						
Print technology	Direct t	hermal				
Print speed Resolution		203mm/sec				
Max print width		203dpi 104.1mm				
Min print length		Continous: 6.4 mm, Peeler: 12.7 mm, Cutter: 20 mm, Tear: 27 mm				
Max print length Media sensor type		3000mm				
Media sensor location	Gap (Transmissive), Bar (Reflective) Gap (Fixed), Reflective (Adjustable)					
Tear off release mode		Standard: Continuous, Tear off Optional: Peeler, Cutter				
Connectivity						
USB	•	•				
Serial Wired LAN	•	•				
General		•				
Dimensions (mm)	190(11) x 22/	1/d) v 155/h)				
Weight	180(w) x 224 2.08	· / / / / / / / / / / / / / / / / / / /				
Control panel	3 buttor					
Operating system support	Windows 7/8/8.1/10 Linux	Windows 7/8/8.1/10, Windows Server				
Supported commands		2008/2008R2/2012/2012R2/2016 Linux er, ZPL II emulation, CPCL emulation				
Media	1 todon remplato, 200/1, reade	A, ZI E II OHIGIATOR, OF OL OHIGIATION				
Media types	Wristhands Continuous Dia c	ut Fan fold Perforated Tag				
Media types Media thickness		Wristbands, Continuous, Die cut, Fan fold, Perforated, Tag 0.058mm - 0.279mm (0.002 inch to 0.011 inch)				
Media width	19mm - 118.11 mm (0.	<u>'</u>				
Media length	6.4mm - 3,000 mm (0.2	6.4mm - 3,000 mm (0.25 inch to 118.11 inch)				
Diameter (Max)	127mm (127mm (5 inch)				
Core Diameter (Max)	12.7mm (C	12.7mm (0.5 inch)				
Power						
Adapter	AC adapter (100 -	- 240V 50/60Hz)				
Software						
Barcode symbologies	Linear: CODE 39, ITF(I-2/5), EAN-8(JAN8), EAN-13(JAN13), UPC-A, UPC-E, CODABAR (NW-7), CODE 128, GS1-128(UCC/EAN 128), GS1 Databar (Standard (Omnidirectional)/Truncated/Stacked/Stacked Omnidirectional/Limited/Expanded), CODE93, POSTNET, UPC/EAN EXTENSION, MSI, Intelligent Mail Barcode 2-dimensional: QR Code (model 1, model 2, micro QR), Maxicode, PDF417 (Standard, Truncate, MicroPDF417) Data Matrix (ECC200 Square, ECC200 Rectangular) Aztec					
Internal fonts	ESC/P> Bitmap font: LetterGothicBold (16,24,32,48dot), Helsinki (16,24,32,48dot), Brussels (24,32,48dot), Brougham (24,32,48dot), San Diego (24,32,48dot), Gothic (16,24,32dot) Outline font: LetterGothicRegular, Helsinki, Brussels, Gothic (1 – 400dots) <p-touch template=""> Outline font: LetterGothicRegular, Helsinki, Brussels, Gothic (1 – 400dots) Downloadable font support* via Font Manager software</p-touch>					
Memory						
RAM	2561	MB				
Flash	64MB					
Environmental						
Operating temperature	Operate: 5°C to 40°C					
Operating humidity	20 - 85% (No condensation, Max wet bulb temperature: 27°C)					
Storage temperature	-20°C to 60°C					
Storage humidity Weights & Dimensions	10 - 90% (No c	condensation)				
Weights & Dimensions	100/	(4) - 004/4				
Dimensions (mm)		180(w) x 155(d) x 224(h)				
Weights Included Items	2.08	2.08kg				
	AC adaptor & cord, USB	cable decumentations				
Supplied in box	AC adaptor a cord, USB	cable, documentations				

 $^{^{\}ast}$ Font licensee permissions are required.


TD-4D Accessories and consumable supplies

Brother has designed and engineered a wide range of accessories to help customise the solution to meet your specific labelling requirements. Brother accessories help users equip their device to cope with the specific requirements of use.

TD-4D Additional Options

PA-LP-002 TD-4D series only Label Peeler

TD-4410D TD-4420DN



TD-4410D TD-4420DN



PA-HU2-001 TD-4D series only Thermal Print Head (203dpi)

TD-4410D TD-4420DN



PA-PR2-001 TD-4D series only Platen Roller (203dpi)

TD-4410D TD-4420DN



TD-4D Consumables						
RD Rolls	Size	Quantity	Colour	Item No		
Continuous receipt roll	102mm x 27.7m	n/a	White	RD-M01E5		
Continuous receipt roll	76mm x 35.3m	n/a	White	RD-P08E5		
Continuous receipt roll	58mm x 86m	n/a	White	RD-S07E5		
Continuous receipt roll	58mm x 12m	n/a	White	RD-R03E5		
Continuous label roll	102mm x 44.7m	n/a	White	RD-S01E2		
Die cut labels roll	102mm x 50mm	843 labels	White	RD-S03E1		
Die cut labels roll	102mm x 152mm	72 labels	White	RD-M03E1		
Die cut labels roll	102mm x 152mm	281 labels	White	RD-S02E1		
Die cut labels roll	76mm x 26mm	1564 labels	White	RD-S04E1		
Die cut labels roll	76mm x 44mm	335 labels	White	RD-P09E1		
Die cut labels roll	51mm x 26mm	1564 labels	White	RD-S05E1		
Die cut labels roll	51mm x 26mm	450 labels	White	RD-Q04E1		





With label design apps for desktop PC's and mobile devices, and SDK's to integrate the TD range into your own applications, you can choose the best option for your label printing needs.

Brother provides all the necessary tools required for software developers to integrate printing into their applications. Printer drivers are available for Windows OS.

Software Support Features

P-touch Editor

Supplied as standard, you can create your own custom labels with pixel precision by using this powerful software solution. With features such as support for over 15 barcode protocols, advanced image dithering to print high quality grayscale images, and the ability to link to data contained in Excel spreadsheets for batch printing of labels, any label design is possible.

Crop Function

Built into the Windows driver, this function helps take away the inconvenience of using A4 sheets of labels in your standard printer. This clever feature automatically scans through the document and where a barcode is present it extracts shipping or product labels one at-a-time then prints as individual on the Brother label printer.

Printer Commands

With support for ZPL II emulation and a variety of additional printer command languages, developers can easily integrate printing into existing legacy systems (see specification tables for further details).

Template Mode

Design the required document on your Windows PC, including logos and barcodes. Once transferred and stored in the printer's memory, the template can be recalled and any data replaced, before printing with just a few short commands.

Compatibility may vary dependent on model - check table on following page





orother at your side